


Cilindros D.E. vástago roscado [Serie 8400]

Threaded-rod D.A. cylinders [Series 8400] / Vérins D.E. avec tige filetée [Série 8400]

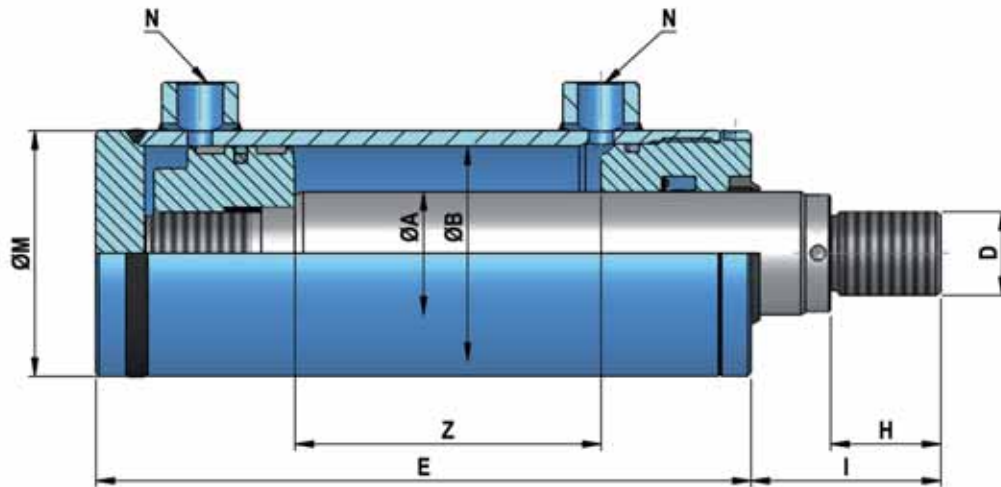

REF.	Ø A	Ø B	E	D	H	I	M	N BSP
8400/Z	20	32	107 + Z	M14x1,5	18	35	40-42	1/4
8401/Z	22	40	97 + Z	M16x1,5	22	40	50	3/8
8402/Z	25							
8403/Z	28	50	104 + Z	M20x1,5	28	48	60	3/8
8404/Z	25							
8405/Z	28							
8406/Z	30							
8407/Z	36	60	106 + Z	M27x2	36	58	70	3/8
8408/Z	30							
8409/Z	35							
8410/Z	40							
8411/Z	36	63	106 + Z	M27x2	36	58	75	3/8
8412/Z	40							
8413/Z	45							
8414/Z	35							
8415/Z	40	70	114 + Z	M27x2	36	58	80	3/8
8416/Z	45							
8417/Z	36							
8418/Z	40							
8419/Z	45	80	126 + Z	M33x2	45	68	90-95	3/8
8420/Z	50							
8421/Z	56							
8422/Z	45							
8423/Z	50	100	138 + Z	M42x2	56	85	115	1/2
8424/Z	56							
8425/Z	60							
8426/Z	70							
8427/Z	70	125	210 + Z	M48x2	63	92	145	3/4
8428/Z	90							
8429/Z	80	140	223 + Z	M64x3	85	120	160	3/4
8430/Z	90							
8431/Z	110	160	238 + Z	M80x3	95	130	180	1
8432/Z	110							
8432/Z	110	200	278 + Z	M80x3	95	130	230	1

Z = carrera (a definir por el cliente). Consultar amarres de vástago en la página 39.

Z = stroke (to be defined by customer). Check rod attachments on page 39.

Z = course (à définir par le client). Vérifiez les fixations de tige sur page 39.

