



CILINDROS Y CROMADOS PALENTINOS, S.L.


Ferrocarril, 5 (Pol. Ind. Municipal)
 34210 Dueñas (Palencia) – España
 Tel. (34) 902 15 30 45 – 979 761 434 / Fax (34) 979 781 000
 Web: www.cicrosa.com / Email: ventas@cicrosa.com

DOUBLE ACTING MINI POWER PACKS

Minipower packs with solenoid valve NG6 to operate a double acting cylinder in the following applications:

Technical data:

- ☑ 12V/24V DC powerunit.
- ☑ 2.1cc/rev gear pump.
- ☑ 1.6kw 12VDC electric motor c/w relay and plastic motor cover.
- ☑ 4.5 Litre or 8.0 Litre reservoir c/w drain plug.
- ☑ Powerpack complete with suction strainer, return oil conveyor and filler breather.
- ☑ Horizontal mounting.
- ☑ Max pressure 200 bar.
- ☑ Relief valve set at 160 bar but adjustable from 40-200 bar
- ☑ Max flow 5 l/min.
- ☑ Relief valve and P line check.
- ☑ Port size 3/8" BSP.

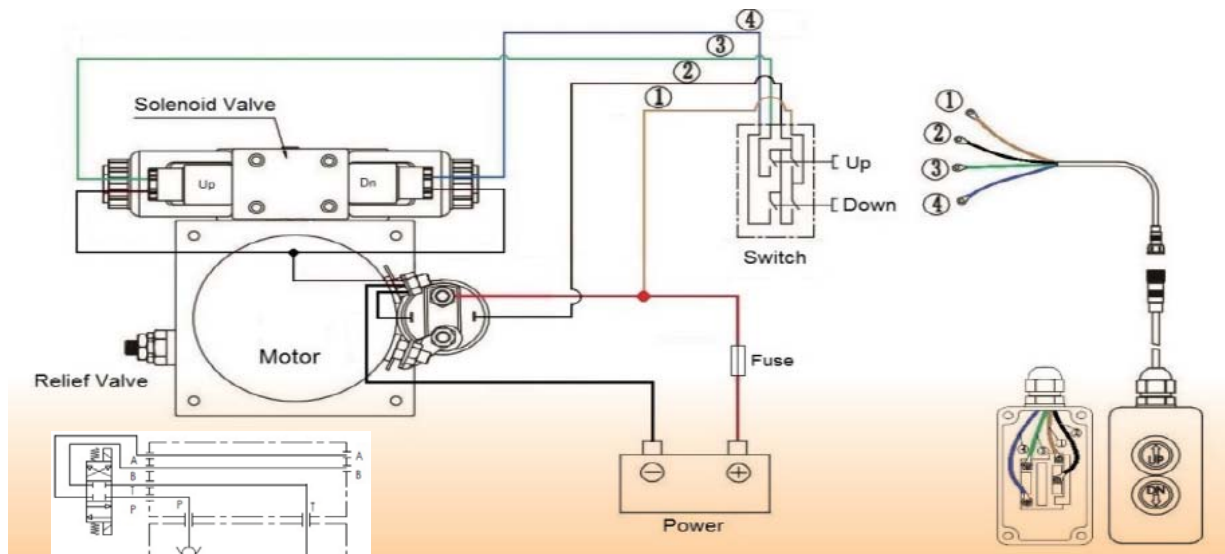

(*) 2 Button detachable magnetic pendant on a 4 metre lead plus plastic support inclusive.

Ref.	Description	TARIFF (EUR)	Ref.	Description	TARIFF (EUR)
MC4L12VDEBOT	DOUBLE ACTING MINIPOWER PACK 12V DC 1.6kw 160bar WITH 4,5L TANK(*)	745,00	MC8L12VDEBOT	DOUBLE ACTING MINIPOWER 12V DC 1.6kw 160bar WITH 8L TANK (*)	825,00
MC4L24VDEBOT	DOUBLE ACTING MINIPOWER PACK 24V DC 1.6kw 160bar WITH 4,5L TANK(*)	745,00	MC8L24VDEBOT	DOUBLE ACTING MINIPOWER 24V DC 1.6kw 160bar WITH 8L TANK (*)	825,00
BTC4MDE	D.A. SWITECH-BOARD + CABLE 4 m.	66,00			

Updated 01/01/2017